
EMERGENCY DRIVER WIRING DIAGRAM

Dimmable LED driver with remote emergency module and independent test button — without MOSB sensor

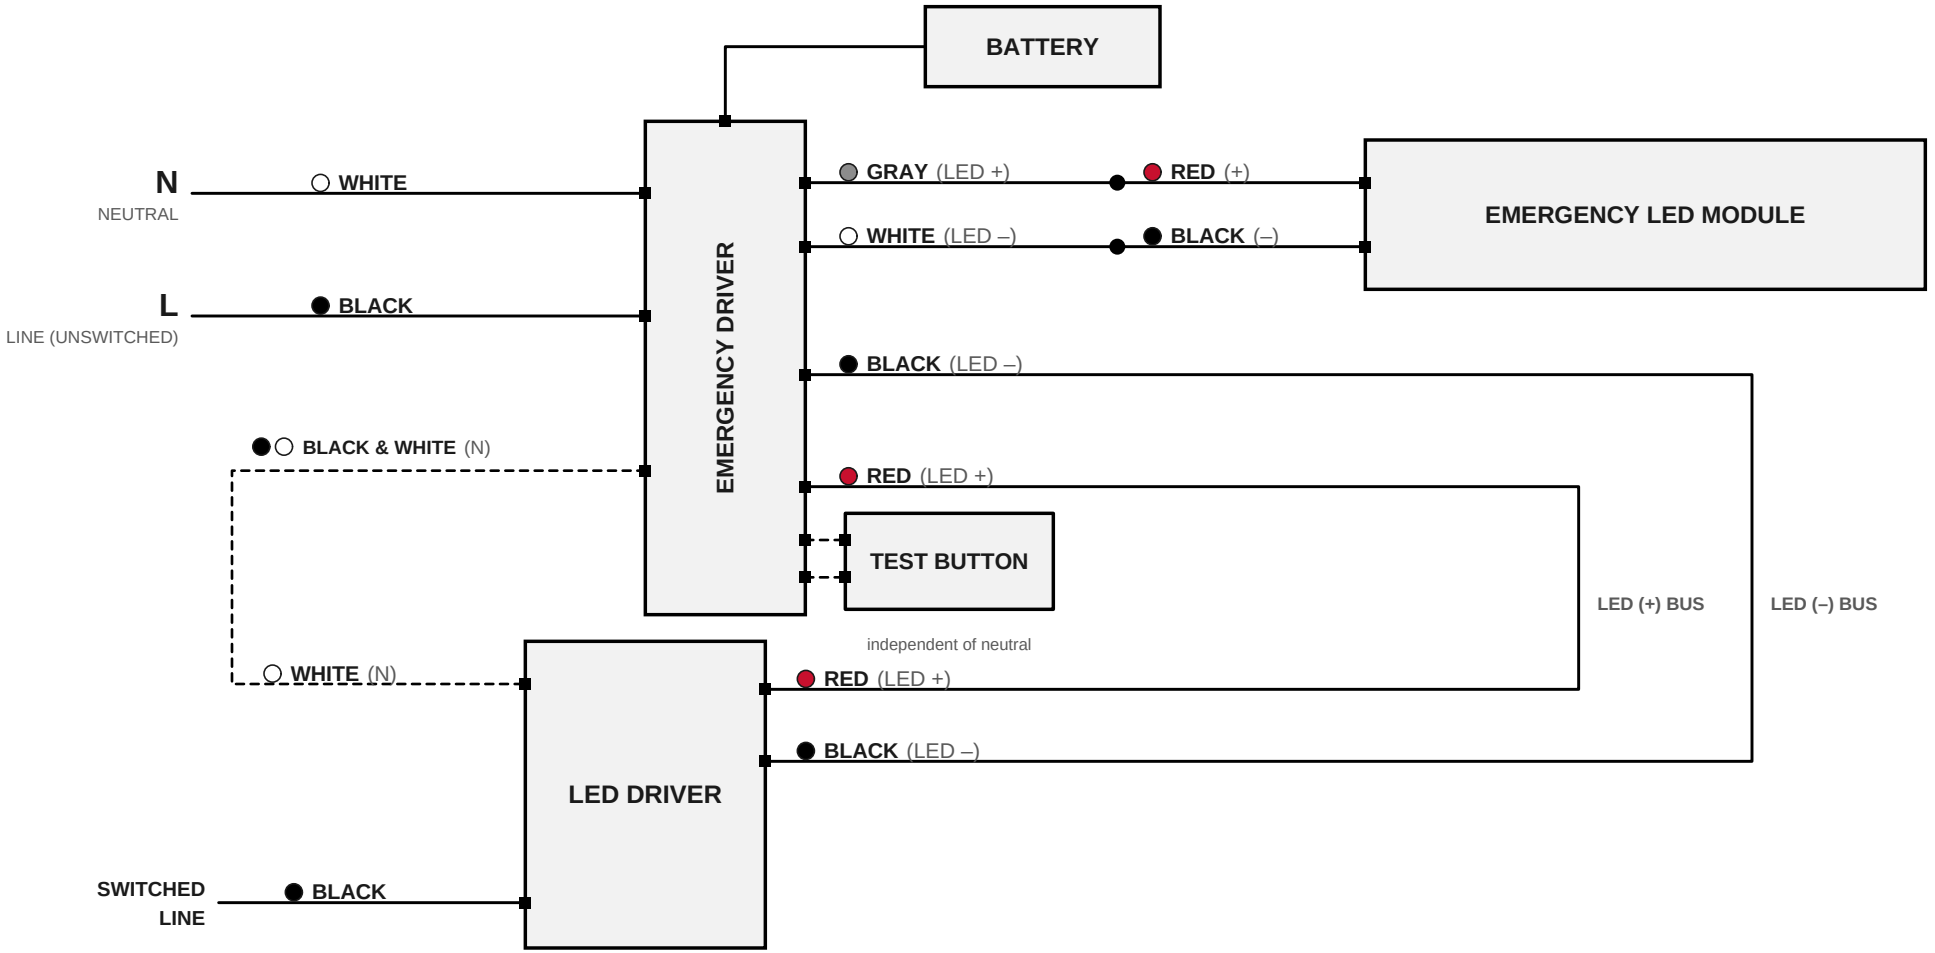

NOTES

1. Solid lines are line-voltage / LED output conductors. Dashed lines are the neutral pair and test-button leads.
2. A filled dot indicates a spliced connection; open squares are device terminals.
3. L and N are unswitched mains and must remain energized for battery charging.
4. Emergency LED module pigtails RED (+) / BLACK (–) splice to the driver GRAY (LED +) / WHITE (LED –) leads.
5. The BLACK & WHITE pair from the emergency driver is the neutral connection and ties to the LED driver neutral, WHITE (N).
6. The test button is an independent device wired to its own driver terminals; it is not in the neutral run.
7. LED driver RED (LED +) / BLACK (LED –) tie directly to the emergency driver output leads.
8. Verify all terminations against the driver manufacturer instructions before install.

GlobaLux Lighting, LLC

DRAWING TITLE	SHEET
EM Driver Wiring	**1 OF 1**
DESCRIPTION	
LED Driver + EM Module (no MOSB)	
DRAWN BY	DATE / REV
—	**11/12/2026** / **B**

NOT TO SCALE • SCHEMATIC REPRESENTATION ONLY