







Product Dimensions

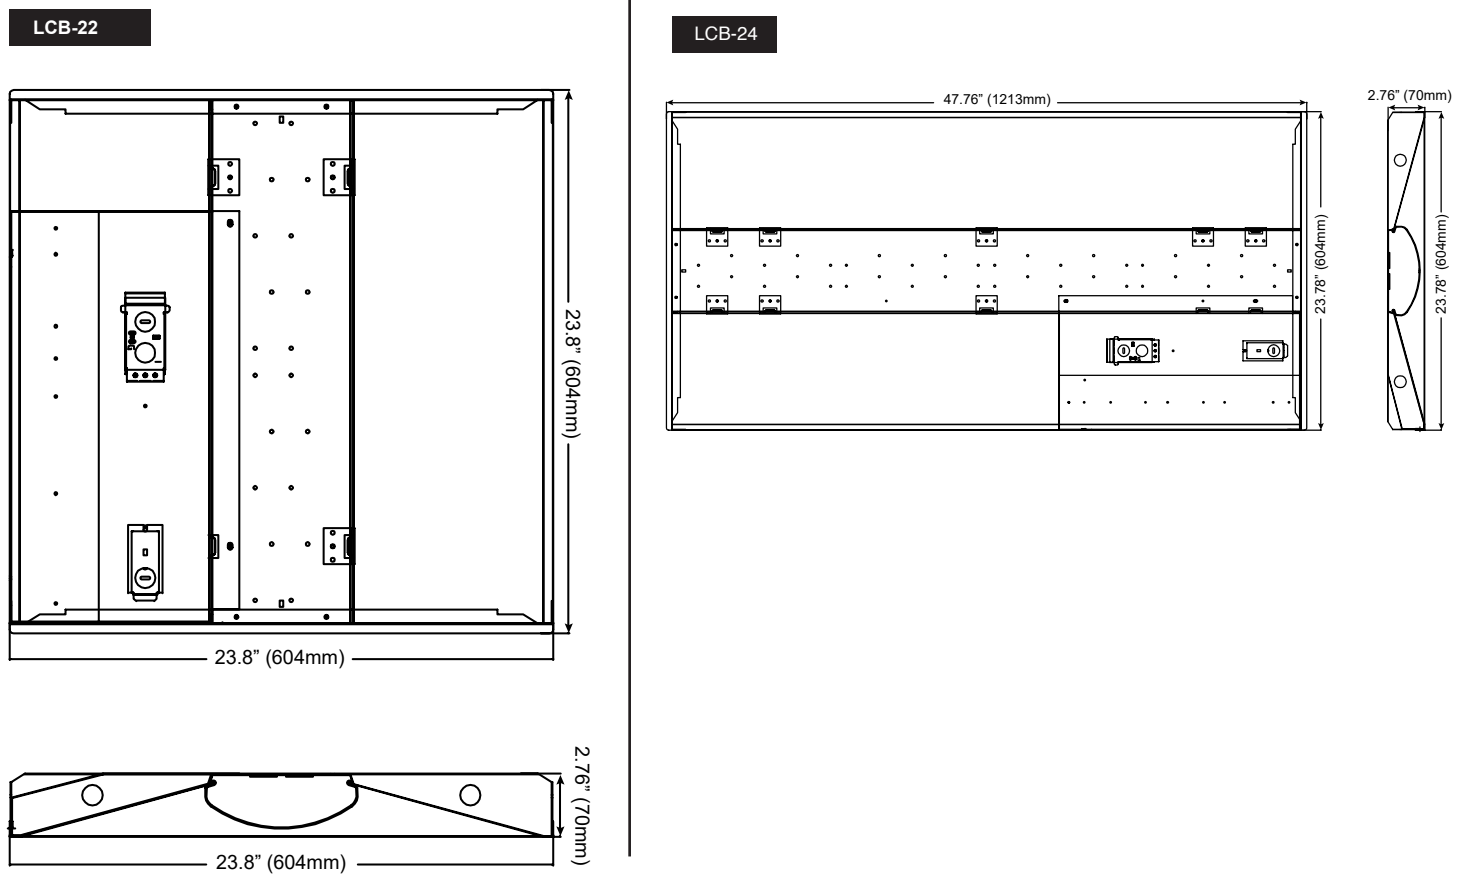

Photometric Data

LCB-22-40-MVD-835 Tested in accordance to IESNA LM-79

Polar Candela Curve



Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	969.1	24.70%	24.80%
0-40	1,604.10	41%	41%
0-60	2,937.60	75%	75.10%
60-90	965.9	24.70%	24.70%
0-90	3,903.60	99.70%	99.80%

Coefficients of Utilization

RCC %:	80				70				50	
	70	50	30	0	70	50	30	0	50	30
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1	1.11	1.11
1	1.08	1.03	0.98	0.94	1.05	1.01	0.96	0.83	0.96	0.93
2	0.98	0.89	0.82	0.76	0.95	0.87	0.8	0.69	0.83	0.78
3	0.89	0.77	0.69	0.62	0.86	0.76	0.68	0.58	0.73	0.66
4	0.81	0.68	0.59	0.52	0.78	0.67	0.58	0.49	0.64	0.57
5	0.74	0.61	0.51	0.45	0.72	0.6	0.51	0.42	0.57	0.5
6	0.68	0.55	0.45	0.39	0.66	0.54	0.45	0.37	0.52	0.44
7	0.63	0.49	0.4	0.34	0.61	0.48	0.4	0.33	0.47	0.39
8	0.59	0.45	0.36	0.3	0.57	0.44	0.36	0.29	0.43	0.35
9	0.55	0.41	0.33	0.27	0.53	0.41	0.32	0.26	0.39	0.32
10	0.51	0.38	0.3	0.24	0.5	0.37	0.3	0.24	0.36	0.29


Effective Floor Cavity Reflectance: 20%

Specifications and Dimensions subject to change without notice.

## Photometric Data

LCB-24-52-MVD-835 Tested in accordance to IESNA LM-79

### Polar Candela Curve

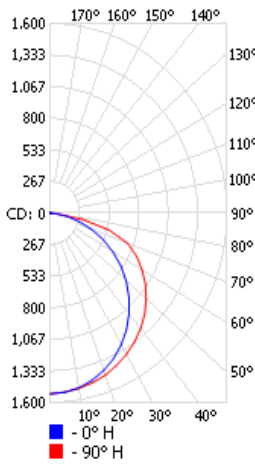

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,207.20	24%	24%
0-40	2,005.30	39.90%	39.90%
0-60	3,707.10	73.70%	73.70%
60-90	1,302.50	25.90%	25.90%
0-90	5,009.60	99.60%	99.70%

### Coefficients of Utilization

RCC %:	80				70				50			
	70	50	30	0	70	50	30	0	50	30		
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1	1.11	1.11		
1	1.08	1.02	0.98	0.94	1.05	1	0.96	0.82	0.96	0.92		
2	0.97	0.88	0.81	0.75	0.94	0.86	0.8	0.68	0.83	0.77		
3	0.88	0.77	0.68	0.61	0.85	0.75	0.67	0.57	0.72	0.65		
4	0.8	0.68	0.58	0.51	0.78	0.66	0.58	0.48	0.64	0.56		
5	0.74	0.6	0.51	0.44	0.71	0.59	0.5	0.42	0.57	0.49		
6	0.68	0.54	0.45	0.38	0.66	0.53	0.44	0.36	0.51	0.43		
7	0.63	0.49	0.4	0.33	0.61	0.48	0.39	0.32	0.46	0.38		
8	0.58	0.44	0.36	0.3	0.57	0.44	0.35	0.29	0.42	0.35		
9	0.54	0.41	0.32	0.26	0.53	0.4	0.32	0.26	0.39	0.31		
10	0.51	0.37	0.29	0.24	0.5	0.37	0.29	0.23	0.36	0.29		

Effective Floor Cavity Reflectance: 20%

## Accessory Options



### Cords and Whips

- FW3** 6' 3 Wire Fixture Whip with 1/2 Connector. in
- FW312** 12' 3 Wire Fixture Whip with 1/2 Connector. in
- FW4** 6' 4 Wire Flex/Whip\_
- SM-22** 2x2 Surface Mount Shroud Kit for RLP, LTF Series Fixtures
- SM-24** 2x4 Surface Mount Shroud Kit for RLP, LTF Series Fixtures

**GlobaLux**  
LIGHTING

© 2019 GlobaLux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. GlobaLux Lighting reserves the rights make changes in specification at any time without notice.

**GlobaLux Lighting LLC**  
www.globaluxlighting.com  
2037 S. Vineyard Ave  
Ontario, CA 91761  
Ph: 909-591-7506