



# High Performance Design Can Customize To Your Environment

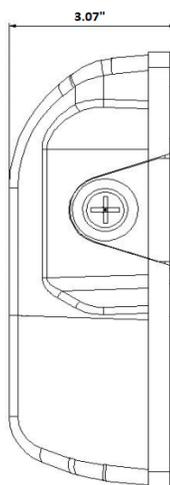

# Ordering Information

## Dimensions

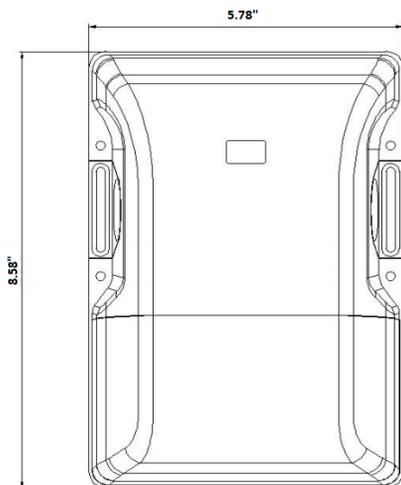

**MWP Series**

15W, (1,800 Lumens)



Rated Life 60,000 hours  
Limited Warranty 5 years  
Efficacy Up to 120 LPW



## Specification Features

### Construction

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation provide superior thermal management for LED life and reliability.

### Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate UL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards.

### Electrical

Equipped standard with 120-277V output driver operating at 60HZ. Equipped with standard dawn to dusk photocell.

### Installation

Designed for mounting on 4" electrical J-Box.

### Warranty

5-year Limited Warranty. See warranty documentation for more information.

## Ordering Information

Example: MWP-15-MVD-830/40/50-P

MWP	20	MV	8	30/40/50	P
<b>Series</b> MWP Security Wall Pack	<b>Rated Wattage</b> 15- 15W, (1,800 Lumens)	<b>Driver Type</b> MVD- 120-277V; 0-10V Dimming	<b>CRI</b> 8 80+ CRI	<b>Color Temp</b> 30/40/50- 3000K, 4000K, 5000K Color Selectable	<b>Options</b> P- Photocell

Specifications and Dimensions subject to change without notice.

# Adders Options & Accessories

## Motions Sensors

P-

Photocell

MVD

120-277V; 0-10V Dimming