


Ordering Information

Dimensions



Specification Features

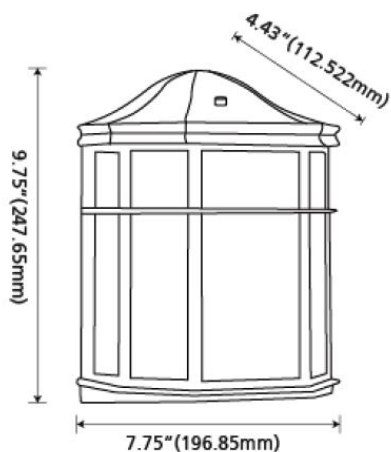

Construction

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for lens life and reliability. Lens design and materials provide uniform appearance without pixelation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K only).Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications.

Electrical

120V Driver operates at 60Hz.

Installation

Designed for mounting on 4" electrical J-Box.

Warranty

3-year Limited Warranty. See warranty documentation for more information.

DOP Series

9W, 800 Lumens
11W,1100 Lumens

Rated Life 50,000 hours
Limited Warranty 3 years
Efficacy Up to 100 LPW

Quick Ship

DOP-9-120-830-BL

Ordering Information

Example:DOP-9-120-830-BL

DOP	9	120	8	30	BL	P
Series DOP LED Decorative Outdoor Poocket Lantern	Rated Wattage 9- 9W, 800 Lumens ^{2 3} 11-11W,1100 Lumens ^{1 2}	Driver Type 120-120V ¹	CRI 8 80+ CRI ³	Color Temp 30 3000K ³	Finish WH- White ¹ BL- Black ³	Options P- Photocell

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

² Energy star listed

³ Quick ship: Made To Order Only