

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



LSC2

LED Square Canopy

The LSC2 family of LED canopy fixtures combine high-performance LED's, highly-engineered optics and traditional designs to bring you the most advanced line of canopy fixtures on the market. Upgraded and improved from the first generation canopy, now Kelvin selectable. The long LED life coupled with exceptional color rendering make this fixture attractive for the new or retrofit projects. Multiple lumen packages mean there is an LSC2 that is just right for your lighting needs.




INPUT VOLTAGE	120-277V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	See Performance Data
DELIVERED LUMENS	See Performance Data
EFFICACY	>114 LPW (typ.)
CRI	80
AVAILABLE CCT	3000K, 4000K, 5000K
LENS TYPE	Plastic

RATED LIFE	50,000hrs (Based on 3hrs a Day)
L70	>50,000hrs
POWER FACTOR	>0.9
THD	N/A
DIMMING	0-10V Continuous (10-100%)
OPERATING TEMP.	-4°F - 113°F / -20°C to 45°C
BEAM ANGLE	N/A

ORDER INFO / EXAMPLE: LSC2-40-MVD-830/40/50

SERIES	RATED WATTAGE	DRIVER TYPE	COLOR TEMP
LSC2	40	MVD	830/40/50
LSC2 LED Square Canopy	40- 40W, 4500 Lumens 70- 70W, 8000 Lumens	MVD- 120-277V; 0-10V Dimming HVD- 347-480V; 0-10V Dimming	830/35/40- 3000K, 4000K, 5000K CCT Selectable; 80+CRI
OPTIONS / ACCESSORIES			
		Emergency Backup EML-20-HVDC 20W Emergency Battery	Controls MOSB-FM Microwave Bi-Level Seonsor Fixture Mount OSBL- Fixture Mounted Occupancy Sensor, Bi-Level

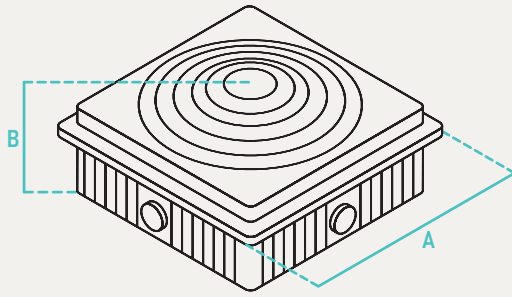

	A	B	Case QTY
LSC2	9.6" SQ	3.4" H	3

CONSTRUCTION

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for lens life and reliability.

ELECTRICAL

Equipped standard with 0-10V continuous dimming driver that works with any standard 0-10V control/dimmer. Long-Life LED's 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs.

QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards.

INSTALLATION

Luminaire mounting design for standard J-Box.
Features multiple conduit entries

WARRANTY

5-year Limited Warranty. See warranty documentation for more info.

PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
40W	3K/4K/5K	40W	4800	120
70W	3K/4K/5K	70W	8400	120

QUICK SHIP

LSC2-40-MVD-830/40/50	LSC2-70-MVD-830/40/50
-----------------------	-----------------------

ADDITIONAL IMAGES



RECOMMENDED DIMMERS

WBSD-010DEC (Cooper)	WBSD-010SLD (Cooper)
DF10P (Cooper)	


COMPATIBLE JUNCTION BOXES



4" PVC	4" Octagon	4" PVC Ceiling Box	3-1/2" Octagon	4" Round Pancake	4" Octagon / V Bracket
--------	------------	--------------------	----------------	------------------	------------------------

PHOTOMETRIC DATA


LSC2-40-MVD-830/40/50

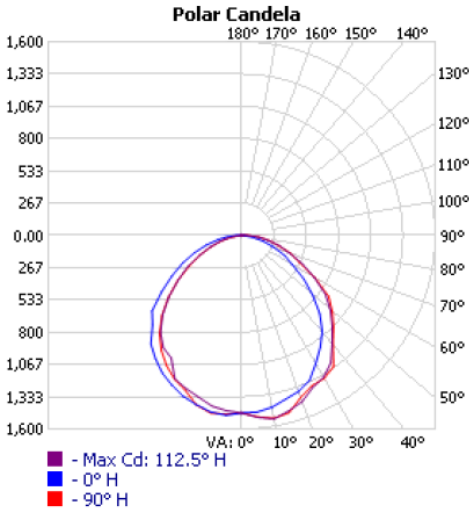

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,158.9	27.7%	27.7%
0-40	1,906.0	45.5%	45.6%
0-60	3,315.7	79.2%	79.3%
60-90	823.8	19.7%	19.7%
70-100	383.3	9.2%	9.2%
90-120	36.5	0.9%	0.9%
0-90	4,139.5	98.8%	98.9%
90-180	44.2	1.1%	1.1%
0-180	4,183.6	99.9%	100%

LSC2-70-MVD-830/40/50

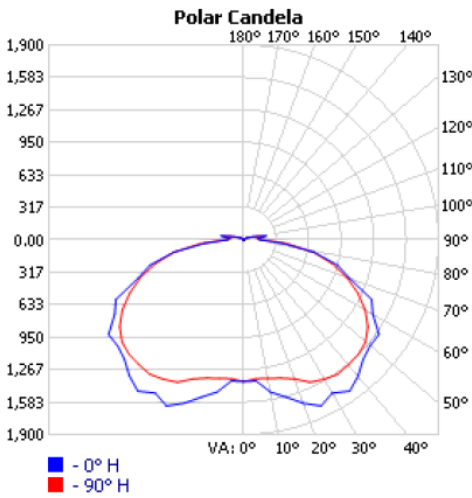

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,329.0	16.3%	16.3%
0-40	2,388.3	29.4%	29.4%
0-60	5,054.1	62.2%	62.2%
60-90	2,727.9	33.6%	33.6%
70-100	1,608.7	19.8%	19.8%
90-120	316.6	3.9%	3.9%
0-90	7,782.0	95.7%	95.7%
90-180	347.4	4.3%	4.3%
0-180	8,129.5	100%	100%

Made to order items. Minimum 90 day lead time. Minimum order quantity may vary please contact sales.

¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 & Title 24 / Typical color consistency. May vary or be changed.

L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact Globalux for detailed information. / Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.