



Project	
Notes	
Type	Date
Cat. No.	

GLED™ Series T5 Linkable LED Undercabinet Fixture

DESCRIPTION

The GLED series is a next generation, direct wire undercabinet fixture that Provides task or accent lighting in commercial, retail, hospitality and residential applications.



Specification Features

Construction

Low profile steel housing available in white, nickel, satin, or oil rubbed bronze finishes. Designed to prevent “hot spots” on counter tops. Lens design and materials provide uniform appearance without pixleation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (3000K) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

Electrical

Equipped standard with 120V fixed output driver, operating at 60Hz. On/Off Rocker Switch Standard. Ships standard with 3' Power Cord.

Installation

Each unit is secured to mounting surface using two fasteners. All mounting hardware included.

Warranty

3-year Limited Warranty. See warranty documentation for more information.



GLED Series

- 12- 12” Length
- 24- 24” Length
- 36- 36” Length
- 48- 48” Length

Rated Life 50,000 hours
 Limited Warranty 3 years
 Efficacy Up to 51 LPW

Quick Ship

- GLED-12-5-120-830-WH
- GLED-24-9-120-830-WH
- GLED-36-14-120-830-WH
- GLED-48-15-120-830-WH

Ordering Information

Example: GLED-12-5-120-830-WH

UCL	12	5	120D	9	30	WH
Series	Form Factor	Rated Wattage	Driver Type	CRI	Color Temp	Finish
GLED T5 Linkable LED Undercabinet Fixture	12- 12” Length ² 24- 24” Length ² 36- 36” Length ² 48- 48” Length ²	5- 5W, 12” Length ² 9- 9W, 24” Length ² 14-14W, 36” Length ² 15-15W, 48” Length ²	120- 120V	8 80+ CRI	30-3000/4000 Kelvin	WH- White ²
Options						
Accessories						
GLED-EC-12 - 12" Extension Cable for GLED GLED-EC-24 - 24" Extension Cable for GLED GLED-PC-36- 6' Power Cable for GLED						

Specifications and Dimensions subject to change without notice.

Performance Summary

Input Voltage	120V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	51 LPW
CRI	80+
Available CCT ¹	3000K
Color Consistency ²	5-step MacAdam Ellipse
Rated Life	50,000 hours
L70 ³	> 72,000 hours or > 45,000
Power Factor	>0.98
THD	< 20%
Operating Temp.	-18°C to 40°C

Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
Opal		GLE-12-5-120-830-WH	5	194	38
		GLE-24-9-120-830-WH	9	358	39
		GLE-36-14-120-830-WH	14	613	43
		GLE-48-15-120-830-WH	15	767	51

NOTES:


- ¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- ² Energy star listed
- ³ Quick ship: 3000K
- ⁴ Typical color consistency. May vary or be changed.
- ⁵ L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information
- ⁶ Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.



Specifications and Dimensions subject to change without notice.

Product Dimensions

GLED

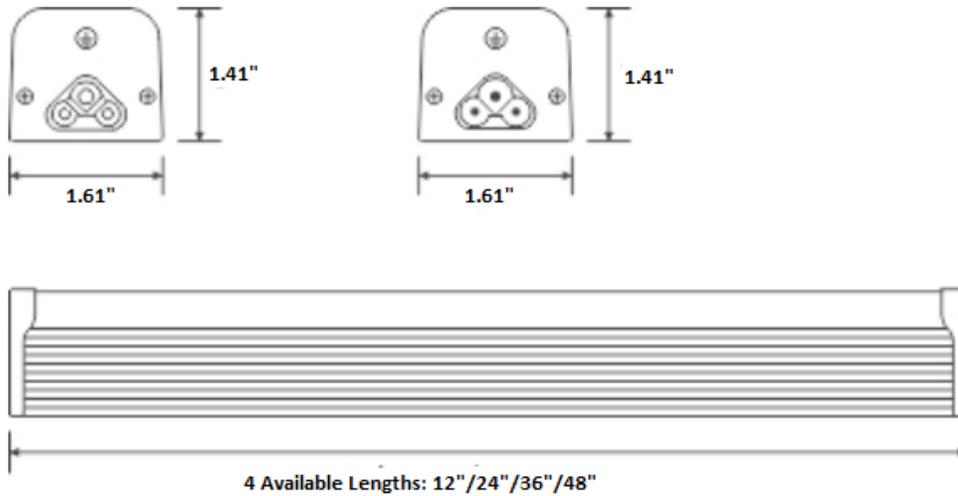

© 2020 Globalux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. Globalux Lighting reserves the rights make changes in specification at any time without notice.