

Each unit is secured to mounting surface using two fasteners. All mounting hardware included.

Product Dimensions

GLED-9




GLED-24

GLED-36

GLED-48

UCL-21


UCL-42

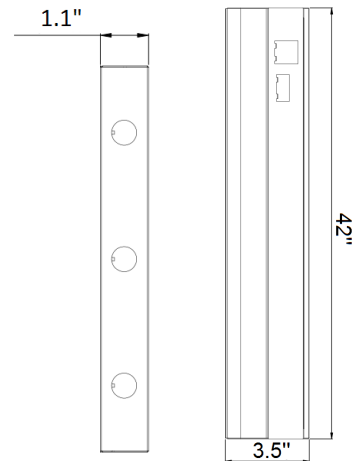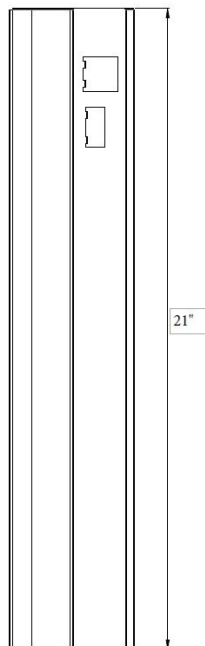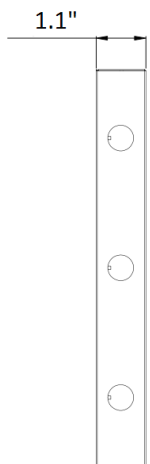

Specifications and Dimensions subject to change without notice.

Photometric Data

UCL-12-5-120D-930/40-WH Tested in accordance to IESNA LM-79

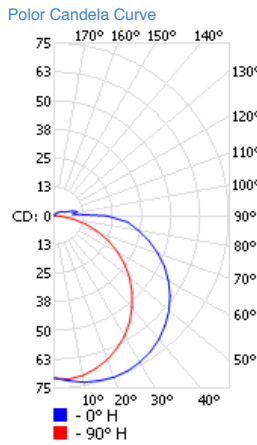

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	54.8	23.70%	23.70%
0-40	90.2	39%	39.10%
0-60	162.9	70.50%	70.50%
60-90	60.8	26.30%	26.30%
0-90	223.6	96.80%	96.80%

Coefficients of Utilization

Effective Floor Cavity Reflectance 20%

RCC %:	80				70				50			
	RW %:	70	50	30	0	70	50	30	0	50	30	
RCR: 0	1.18	1.18	1.18	1.18	1.15	1.15	1.15	0.97	1.09	1.09		
1	1.06	1.01	0.96	0.91	1.03	0.98	0.94	0.79	0.93	0.9		
2	0.96	0.87	0.8	0.73	0.93	0.85	0.78	0.65	0.81	0.75		
3	0.87	0.76	0.67	0.6	0.84	0.74	0.66	0.54	0.71	0.64		
4	0.8	0.67	0.58	0.51	0.77	0.65	0.57	0.46	0.62	0.55		
5	0.73	0.6	0.5	0.43	0.71	0.58	0.49	0.4	0.56	0.48		
6	0.67	0.54	0.44	0.38	0.65	0.52	0.44	0.35	0.5	0.42		
7	0.62	0.48	0.39	0.33	0.6	0.47	0.39	0.31	0.46	0.38		
8	0.58	0.44	0.35	0.29	0.56	0.43	0.35	0.28	0.42	0.34		
9	0.54	0.4	0.32	0.26	0.53	0.4	0.32	0.25	0.38	0.31		
10	0.51	0.37	0.29	0.24	0.49	0.37	0.29	0.23	0.35	0.28		



© 2019 GlobaLux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. GlobaLux Lighting reserves the rights make changes in specification at any time without notice.

GlobaLux Lighting LLC
 www.globaluxlighting.com
 2037 S. Vineyard Ave
 Ontario, CA 91761
 Ph: 909-591-7506