


# Ordering Information

## Dimensions



## Specification Features

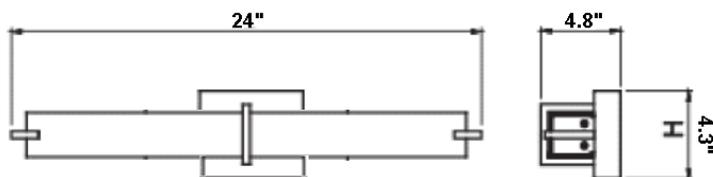

### Construction

Single ring surround a milk white acrylic diffuser with decorative end caps provides widespread and even illumination. Lens design and materials provide uniform illumination without pixelation.

### Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

### Warranty

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

### Electrical

Equipped standard with 120V fixed output driver operating at 60 Hz.

### Installation

Designed for wall mounting on 4" electrical J-Box.

### LRV Series

#### 24" Length

20W, 1,920 Lumens

#### 36" Length

27W, 2,592 Lumens

#### 48" Length

36W, 3,456 Lumens

Rated Life 60,000 hours

Limited Warranty 3 years

Efficacy up to 96 LPW

### Quick Ship

LRV-24-20-120-930-BN  
LRV-36-27-120-930-BN  
LRV-48-36-120-930-BN

## Ordering Information

Example: LRV-24-20-120-930-BN

LRV	24	18	120	CRI	30	NS
<b>Series</b> LRV LED Round Vanity	<b>Form Factor</b> 24- 24" Length <sup>2,3</sup> 36- 36" Length <sup>2,3</sup> 48- 48" Length <sup>2,3</sup>	<b>Rated Wattage</b> <b>24" Housing</b> 20- 20W, 1,920 Lumens <b>36" Housing</b> 27- 27W, 2,592 Lumens <b>48" Housing</b> 36- 36W, 3,456 Lumens	<b>Driver Type</b> 120- 120V <sup>1</sup>	<b>CRI</b> 9 90+CRI	<b>Color Temp</b> 30 3000K <sup>3</sup>	<b>Finish</b> <b>BN-</b> Brushed Nickel <b>ORB-</b> Oil Rubbed Bronze

Specifications and Dimensions subject to change without notice