

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



## LCXS

### Bi-Color LED Combo Exit/Emergency Sign

The LCXS is a newly designed Emergency/ Exit Light combining LED exit illumination with reliable LED Lamp heads. This attractive low-profile design offers maintenance-free, long life dependable application. LCXS/LED Combo unit is ideal for applications requiring both exit and emergency lighting. It's streamlined height makes the combo unit a great fit for above-the-door and other tight-fit applications.




INPUT VOLTAGE	120-277V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	2W
DELIVERED LUMENS	N/A
EFFICACY	100 LPW (typ.)
CRI	>70CRI
AVAILABLE CCT	6500K
LENS TYPE	N/A

RATED LIFE	30,000hrs (Based on 3hrs a Day)
L70	N/A
POWER FACTOR	>0.45
THD	N/A
DIMMING	N/A
OPERATING TEMP.	32°F - 104°F / 0°C to 40°C
BEAM ANGLE	120°

#### ORDER INFO / EXAMPLE: LCXS-2-W-GR

QUICK SHIP ITEMS ON PG.2

SERIES	FACES	HOUSING COLOR	LETTERING	OPTIONS
<b>LCXS</b>	<b>2</b>	<b>W</b>	<b>GR</b>	
<b>LCXS</b> LED Combo Exit / Emergency Sign	2- 2 Faces	<b>W</b> - White <b>B</b> - Black	<b>GR</b> - Green / Red	<b>BLANK</b> - 90 Minute Battery Backup <b>AC</b> - AC Only

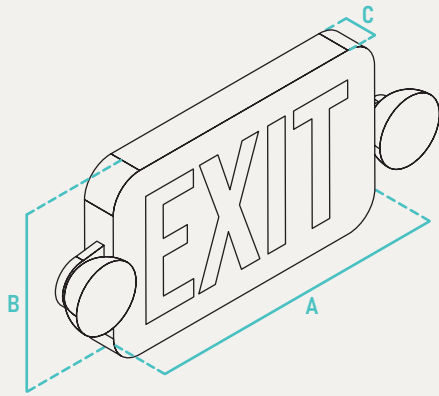

	A	B	C	Case QTY
LCXS	16" W	7-1/4" H	1-15/16" D	6

### CONSTRUCTION

Injection molded, engineering grade 5VA flame retardant, high impact resistant thermoplastic in white or black finish. Aesthetically pleasing, curved faced rounded corner design. EZ snap-out Chevron directional indicators.

### ELECTRICAL

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 3.6 long-life, maintenance - free, rechargeable NiCad battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharged battery in 24 hours.

### QUALIFICATIONS

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations ( 0° C - 50° C ).

### INSTALLATION

Universal knockout pattern on back plate for wall mount. EZ-snap thermoplastic mounting canopy included provides top or end mount.

### WARRANTY

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

### PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
LCXS	6500K	2W	200	100

### QUICK SHIP

LCXS-2-W-GR

### ADDITIONAL IMAGES



Made to order items. Minimum 90 day lead time.

Minimum order quantity may vary please contact sales.

<sup>1</sup> DLC Listed / <sup>2</sup> DLC Premium Listed / <sup>3</sup> Title 24 / <sup>4</sup> JA8 & Title 24

Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information.

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

### COMPATIBLE JUNCTION BOXES



4" PVC	4" Octagon	4" PVC Ceiling Box	3-1/2" Octagon	4" Round Pancake	4" Octagon / V Bracket
--------	------------	--------------------	----------------	------------------	------------------------