



LED Wall Pack
ACLW2 Series



High Performance Design Can Customize To Your Environment

Photocell

Adjustable dusk-to-dusk photocell automatically turns light on at dusk and off at dawn for convenience and energy savings

Adjustable

Tool less, adjustable range of 0° to 90°

Housing

Rugged Die-cast aluminium housing withstands outdoor environments

Backplate

Tool less, separable hinged backplate for easy installation and maintenance



Lens

Clear, injection-molded acrylic lens creates uniform light distribution while maximizing lumen output

High efficiency LED's

60,000 hour LED's at L80 reduce life cycle maintenance costs


ACLW2 Wattage Comparison

	GlobalLux LIGHTING	Conventional HID
Stadiums, warehouses, airports	80W 8,887 Lumens	250W
Parking lots, garages, office buildings	60W 6,562 Lumens	175W
Parking garages, retail stores, office buildings	30W 2,827 Lumens	80W


Ordering Information

Dimensions

30W

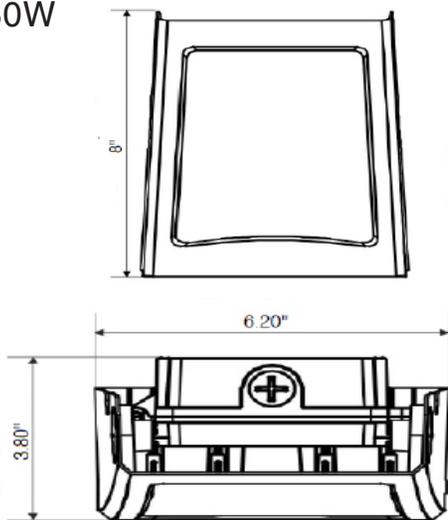

60-80W

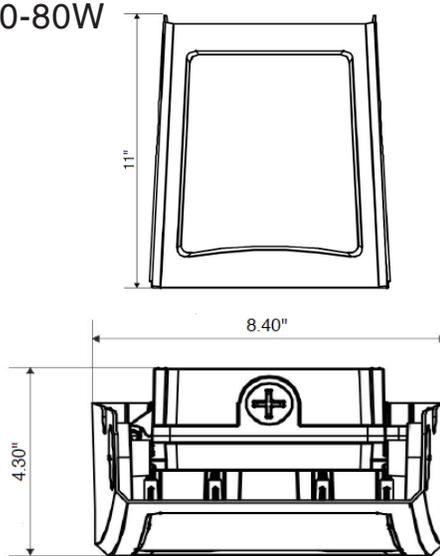

ACW2 Series

30W(2827 Lumens)
60W(6562 Lumens)
80W(8887 Lumens)

Rated Life 60,000 hours
Limited Warranty 5-years
Efficacy Up to 109 LPW

Quick Ship

ACLW2-30-MV-850
ACLW2-60-MV-850
ACLW2-80-MV-850

Specification Features



Construction

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable bronze powder coating to provide resistance to corrosion, rust, weathering or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for LED life and reliability.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Adheres to LM70, LM80, and TM21 industry standards. DesignLights Consortium® (DLC) DLC qualified product. Not all product variations listed are DLC qualified. Please visit the DLC Qualified Products list at www.designlights.org/QPL to confirm which models are qualified.

Electrical

Equipped standard with fixed output driver. Long-Life LED's 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs.

Installation

Luminaire mounting designed for standard 4" J-Box.

Warranty

5-year Limited Warranty. See warranty documentation for more information.

Ordering Information

Example: ACLW2-30-MV-850

ACW2	30	MV	8	50		
Series ACW2 Slim LED Wall Pack	Rated Wattage 30-30W(2827 Lumens) ² 60-60W(6562 Lumens) ² 80-80W(8887 Lumens) ²	Driver Type MV- 120-277V ²	CRI 8 80+ CRI ²	Color Temp 40 4000K ¹ 50 5000K ²		
Options						
Controls						
OSBL-WP- Fixture Mounted Bi-Level Occupancy Sensor						

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
² DLC Listed

Adders Options & Accessories



Fixture Mounted Bi-Level Occupancy Sensor

The OSBL-WP provides multi-level control based on motion and/ or daylight contribution. It controls 0-10V LED drivers or dimming ballasts, as well as non-dimming ballast and is rated wet and cold locations. All control parameters are adjustable.

Motions Sensors

OSBL-WP

Fixture Mounted Bi-Level
Occupancy Sensor