


Ordering Information

Dimensions

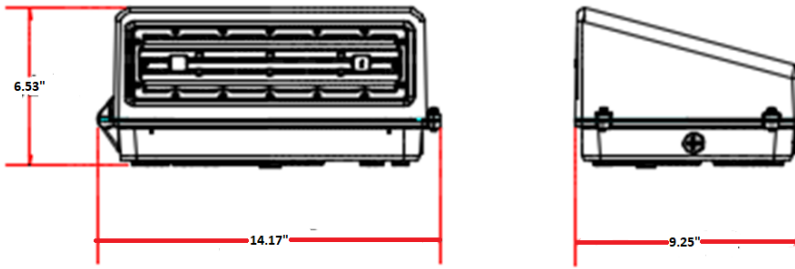

LCWP Series

- 40W (5,000 Lumens)
- 60W (7,500 Lumens)
- 80W (10,000 Lumens)



Specification Features

Construction

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for lens life and reliability.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate UL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. DesignLights Consortium® (DLC) DLC qualified product. Not all product variations listed are DLC qualified. Please visit the DLC Qualified Products List at www.designlights.org/QPL to confirm which models are qualified.

Electrical

Equipped standard with a photocell and fixed output driver. Optional 0-10V continuous dimming driver that works with any standard 0-10V control/dimmer. Long-Life LED's 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs. Adjustable CCT at 3000K, 4000K, 5000K.

Installation

Luminaire mounting designed for standard J-Box. Features multiple conduit entries.

Warranty

5-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

Options

Optional On/Off or Bi-level Motion sensor, high voltage transformers, emergency battery backups.

Rated Life 60,000 hours
Limited Warranty 5 years
Efficacy ~ 140 lm/W

Quick Ship

- LCWP-40-MVD-830/40/50-P
- LCWP-60-MVD-830/40/50-P
- LCWP-80-MVD-830/40/50-P

Ordering Information

Example: LCWP-40-MVD-830/40/50-P

LCWP	40	MVD	8	30/40/50	P
Series LCWP LED Cutoff Wall Pack	Rated Wattage 40- 40W (5000 Lumens) 60- 60W (7500 Lumens) ² 80- 80W (10000 Lumens) ²	Driver Type MV- 120-277V ² MVD- 120-277V, 0-10V Dimming ² HVD- 347-480V, 0-10V Dimming HV- 347-480V	CRI 8 80+ CRI	Color Temp 30/40/50- 3000/4000/5000K	Accessories P-Photocell
			Emergency Backup EML8 800lm EML16 1600lm	Controls MOS- Microwave Sensor MOSB-Bi-Level Microwave Sensor OSBL-WP- Fixture Mounted Bi-Level Occupancy Sensor	

Specifications and Dimensions subject to change without notice.

