



Ordering Information

Dimensions

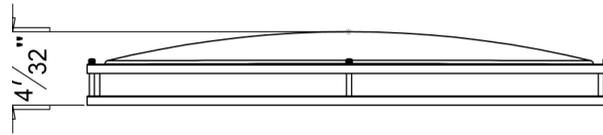

Specification Features

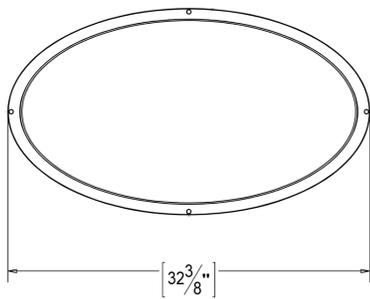

Construction

All luminaires are built to UL 1598 and 2108 standards, milk white acrylic diffuser provides widespread and even illumination.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, CEC Listed.

Warranty

3-year Limited Warranty. See warranty documentation for more information.

Electrical

Equipped with 120-277V fixed output driver operating at 60Hz.

Installation

Designed for wall or ceiling mounting on 4" electrical J-Box.

DCRO Series

34W, (2900) Lumens

Rated Life 50,000 hours
Limited Warranty 3-years
Efficacy Up to 73 LPW

Quick Ship

DCRO-34-MV-930-NS

Ordering Information

Example: DCRO-34-MV-930-NS

DCRO	34	MV	9	30	NS
Series DCRO LED Oval Ringed Decorative Ceiling Light	Rated Wattage 34- 34W (2900) Lumens ²	Driver Type MV- 120-277V ²	CRI 9 90+ CRI ²	Color Temp 30 3000 K ² 40 4000 K ¹	Finish NS- Nickel ²
Options					
Emergency Backup EML8 800lm EML16 1600lm		Controls MOS- Microwave Sensor		Accessories N/A	

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
² Energy star listed

