

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------

MCF

52" Modern Ceiling Fan

The MCF series are a family of ceiling fans featuring a simple 3 blade design. The clean lines and modern design of this AC Motor LED fan makes an elegant addition to your contemporary home décor. The reversible feature makes this fan perfect to use during every season.




FINISH OPTIONS ON PAGE 2

INPUT VOLTAGE	120V	RATED LIFE	20,000hrs (Based on 3hrs a Day)
INPUT FREQUENCY	50/60 Hz	L70	>72,000hrs or >45,000
RATED WATTAGE	18W	POWER FACTOR	>0.99
DELIVERED LUMENS	1000Lm	THD	<20%
EFFICACY	55.5 LPW (typ.)	DIMMING	Yes
CRI	80CRI	OPERATING TEMP.	-0.4°F - 104°F / -18°C to 40°C
AVAILABLE CCT	3000K	RPM (H/M/L)	206 / 158 / 100
FAN DIAMETER	52"	AIRFLOW EFFICIENCY (CFM/W)	97
MOTOR LEAD LENGTHS	80"	AIRFLOW (CFM)	at High Speed:4278
MOTOR SIZE	AC 153mm x 13mm	AVERAGE AIRFLOW CFMave	3209
ELECTRICITY USE (H/M/L)	51.1 / 31 / 12.8	BEAM ANGLE	150°
AMPS (H/M/L)	0.42 / 0.33 / 0.21	LENS TYPE	Acrylic

ORDER INFO / EXAMPLE: MCF-52-3-18-120D-830-BN-SB-PC

QUICK SHIP ITEMS ON PG.2

SERIES	SIZE	FAN BLADE	LIGHT SOURCE	DRIVER TYPE	COLOR TEMP	FINISH	BLADE COLOR	ACCESSORY
MCF	52	3	18	120D	830	BN	SB	PC
MCF 52" Modern Ceiling Fan	52- 52" Sweep	3- 3 Blades	18- 18W Integrated LED 1500 Lumens Blank- No Light Kit	120D- 120V Dims to 10%	830- 3000K, 80+CRI Blank- No Light Kit	BN- Brushed Nickel WH- White BL- Black	SB- Silver / Black Rev. WH- White BL- Black W- Walnut DW- Dark Walnut	PC- Pull Chain CFW- Wall Control

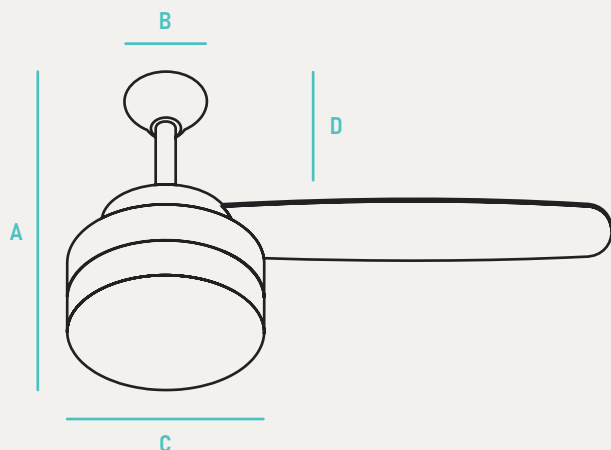

	A	B	C	D	Case QTY
MCF	15-3/4"	5-7/8"	6-9/10"	12-1/5"	1

## CONSTRUCTION

Steel Housing, Plywood Blades and Arylic Light Diffuser provides uniform appearance without pixelation.

## MOTOR

3-Speed AC Motor with 80" Lead Wire. Includes (1) 6" Downrod.

## QUALIFICATIONS

All ceiling fans are built to UL 507 standards, and bear appropriate ETL labels. Dry location labeling is standard.

## BLADES

52" Sweep, 3 Blade Configuration, Blade Pitch Angle:12°, Color: Silver

## ELECTRICAL

Operates at 120V 60HZ. Optional Remote Control (Sold Separately).  
Optional Wall Control (Sold Separatley) .

## WARRANTY

Light Source: 3-year limited warranty. Motor: Limited Lifetime Warranty.  
Non-Electrical 1 Year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

## RECOMMENDED DIMMERS

DVCL-153P (Lutron)

## QUICK SHIP

MCF-52-3-18-120D-830-BN-SB-PC

MCF-52-3-18-120D-830-BL-BL-PC

## ADDITIONAL IMAGES



No Light Kit














## COMPATIBLE JUNCTION BOXES



4" PVC Ceiling Box

## INSTALLATION INSTRUCTIONS

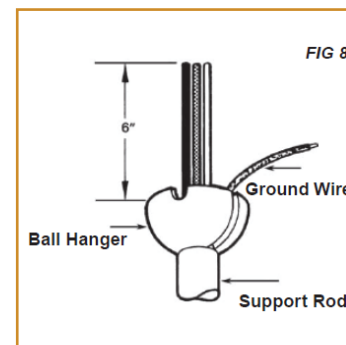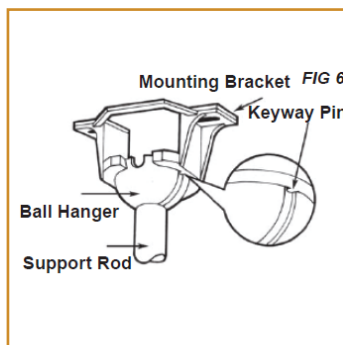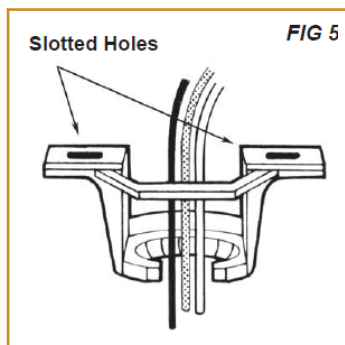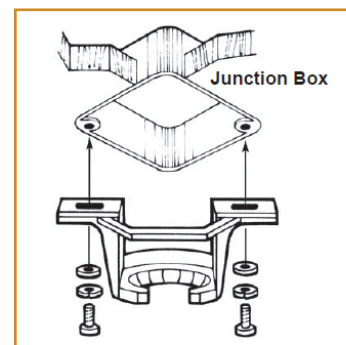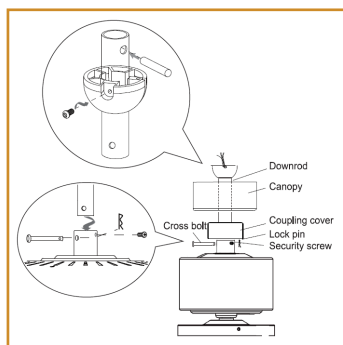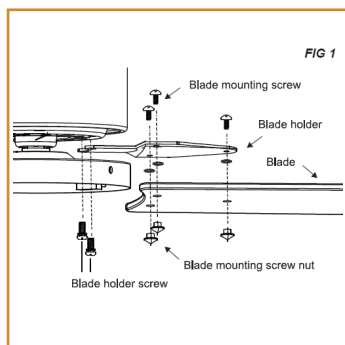

Made to order items. Minimum 90 day lead time. Minimum order quantity may vary please contact sales.

<sup>1</sup> DLC Listed / <sup>2</sup> DLC Premium Listed / <sup>3</sup> Title 24 / <sup>4</sup> JA8 & Title 24 / <sup>5</sup> Energy Star / Typical color consistency. May vary or be changed.

L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information. / Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.