GLOBALUX
LIGHTING & FANS

PROJECT	NOTES	TYPE	DATE	CAT. No.

SKY

SkyLux 52" Ceiling Fan

The SKY series are a family of ceiling fans featuring a simple
3 blade design. The clean lines and modern design of this AC Motor LED
fan makes an elegant addition to your contemporary home décor.
The reversible feature makes this fan perfect to use during every season.
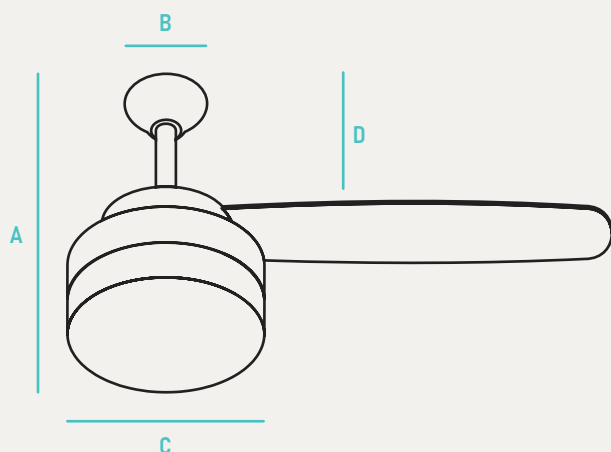(While supplies last)

FINISH OPTIONS ON PAGE 3

ETL LISTED

3 YR WARRANTY

INPUT VOLTAGE	120V
INPUT FREQUENCY	50/60 Hz
RATED WATTAGE	2-9W LED Bulbs
DELIVERED LUMENS	650Lm
EFFICACY	72 LPW (typ.)
CRI	80CRI
AVAILABLE CCT	3000K
FAN DIAMETER	52"
MOTOR LEAD LENGTHS	17"
MOTOR SIZE	AC 153mm x 13mm
ELECTRICITY USE (H/M/L)	54.81W / 29.5W / 12.01W
AMPS (H/M/L)	0.45 / 0.35 / 0.22
LENS TYPE	Glass

COLOR CONSISTENCY	5-Step MacAdams Ellipse
RATED LIFE	50,000hrs (Based on 3hrs a Day)
L70	>72,000hrs or >45,000
POWER FACTOR	>0.99
THD	<20%
DIMMING	Yes
OPERATING TEMP.	-0.4°F - 104°F / -18°C to 40°C
RPM (H/M/L)	190 / 145 / 88
AIRFLOW EFFICIENCY (CFM/W)	89
AIRFLOW (CFM)	High Speed: 5,215
AVERAGE AIRFLOW CFMave	3790
BEAM ANGLE	N/A

ORDER INFO / EXAMPLE: SKY-52-3-2MB-120D-830-BN-SL-PC

SERIES	SIZE	FAN BLADE	LIGHT SOURCE	DRIVER TYPE	COLOR TEMP	FINISH	BLADE COLOR	ACCESSORY
SKY	52	3	2MB	120D	830	BN	SL	PC
SKY SkyLux Ceiling Fan	**52-** 52" Sweep	**3-** 3 Blades **4-** 4 Blades **5-** 5 Blades	**2MB-** 2 Medium Base Socket (2) 9W, 650 Lumens	**120D-** 120V Dimmable	**830-** 3000K, 80CRI	**BN-** Brushed Nickel **WH-** White **BL-** Black	**SL-** Silver **WH-** White **BL-** Black **SB-** Silver / Black Reversible	**PC-** Pull Chain **WC-** Wall Control

Dimensions diagram (A, B, C, D)

	A	B	C	D	Case QTY
SKY	18"	9-1/2"	5"	10-1/3"	1

CONSTRUCTION
Steel Housing, Plywood Blades and Frosted Glass Light Diffuser provides uniform appearance without pixelation.

MOTOR
3-Speed AC Motor with 17" Lead Wire and Dual Mount feature. Includes (1) 5" Downrod.

QUALIFICATIONS
All ceiling fans are built to UL 507 standards, and bear appropriate ETL labels. Dry location labeling is standard.

BLADES
52" Sweep; 3,4 or 5 Blade

ELECTRICAL
Operates at 120V 60HZ. Optional Remote Control (Sold Separately). Optional Wall Control (Sold Separatley) .

WARRANTY
Light Source: 3-year limited warranty. Motor: Limited Lifetime Warranty. Non-Electrical 1 Year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

COMPATIBLE JUNCTION BOXES

4" PVC Ceiling Box

QUICK SHIP (WHILE SUPPLIES LAST)

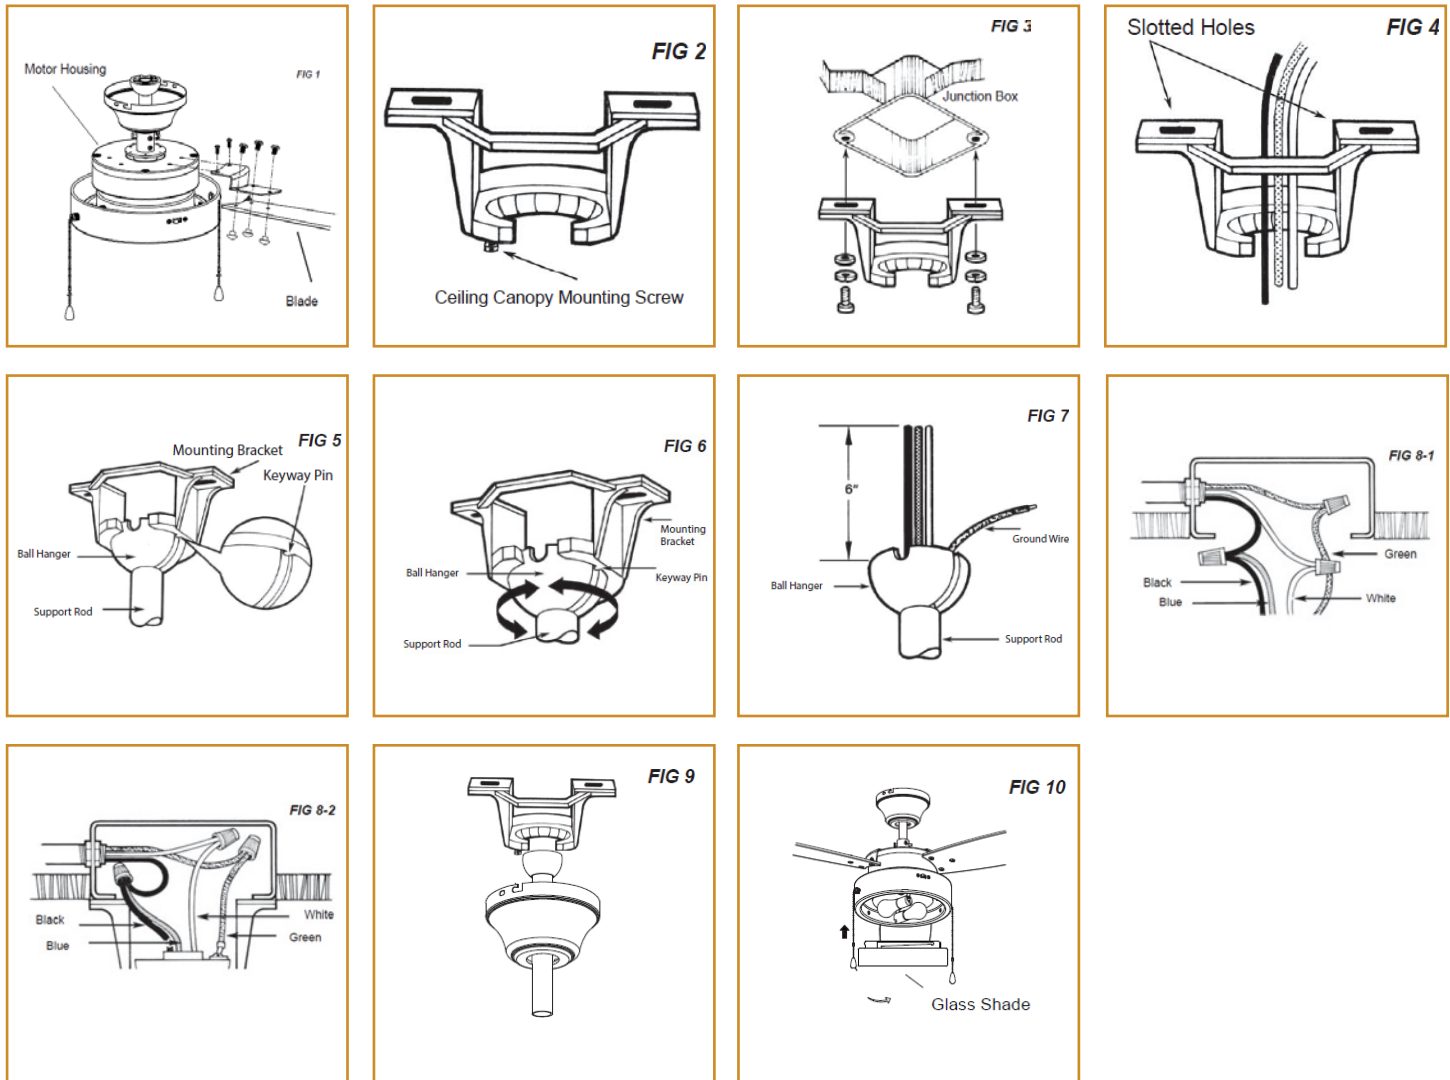| SKY-52-3-2MB-120-830-BL-BL-PC	SKY-52-3-2MB-120D-830-BN-SL-PC

FINISH OPTIONS / ACCESSORIES

Wall Control

Remote Control

INSTALLATION INSTRUCTIONS

FIG 1 — Motor Housing / Blade

FIG 2 — Ceiling Canopy Mounting Screw

FIG 3 — Junction Box

FIG 4 — Slotted Holes

FIG 5 — Mounting Bracket / Keyway Pin / Ball Hanger / Support Rod

FIG 6 — Mounting Bracket / Ball Hanger / Keyway Pin / Support Rod

FIG 7 — 6" / Ball Hanger / Ground Wire / Support Rod

FIG 8-1 — Black / Blue / Green / White

FIG 8-2 — Black / Blue / White / Green

FIG 9

FIG 10 — Glass Shade