

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



## CVL

### Curved Glass Vanity LED Light

The CVL Bathroom Vanity LED Lights bring contemporary elegance to various interior styles. Its curved soft white glass shades harmonize with sleek metal components. Available in 4 lighting configurations, making it a versatile choice for bathrooms and adding a touch of grace to your space.




INPUT VOLTAGE	120V	RATED LIFE	35,000hrs (Based on 3hrs a Day)
INPUT FREQUENCY	60 Hz	L70	N/A
RATED WATTAGE	See Performance Data	POWER FACTOR	>0.9
DELIVERED LUMENS	See Performance Data	THD	N/A
EFFICACY	70 LPW (typ.)	DIMMING	Triac Dimming
CRI	80 (LED Models)	OPERATING TEMP.	32°F - 104°F / 0°C to 40°C
AVAILABLE CCT	3000K (LED Models)	BEAM ANGLE	120°
LENS TYPE	Glass		

#### ORDER INFO / EXAMPLE: CVL-3-24-120D-830-BN

QUICK SHIP ITEMS ON PG.2

SERIES	FORM FACTOR	LAMP CONFIGURATION	DRIVER TYPE	COLOR TEMP	FINISH
CVL	3	24	120D	830	BN
CVL Curved Glass Vanity Light	1- 1 Light 2- 2 Light 3- 3 Light 4- 4 Light	1 Light 8- 1x8W LED 2 Light 16- 2x8W LED 3 Light 24- 3x8W LED 4 Light 32- 4x8W LED  MB- E26 Medium Socket (Special Order)	120D- 120V Triac Dimming	LED Only 830- 3000K, 80CRI  BLANK- Blank for MB Configuration	BN- Brushed Nickel

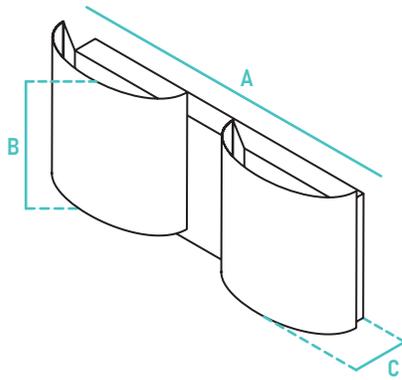

## PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
1 Light	3000K	8W	560	70
2 Light	3000K	16W	1120	70
3 Light	3000K	24W	1680	70
4 Light	3000K	32W	2240	70

## QUICK SHIP

CVL-1-8-120D-830-BN	CVL-3-24-120D-830-BN
CVL-2-16-120D-830-BN	CVL-4-32-120D-830-BN

## ADDITIONAL IMAGES



## RECOMMENDED DIMMERS

DVCL-153P (Lutron)

	A	B	C	Case QTY
CVL-1-8	8-1/4" W	6" H	4-1/8" D	8
CVL-2-16	18-3/4" W	6" H	4-1/8" D	4
CVL-3-24	28-3/4" W	6" H	4-1/8" D	4
CVL-4-32	38-3/4" W	6" H	4-1/8" D	4

## CONSTRUCTION

White Glass shades surround an elongated aluminum bar and mounting plate. Lens design and materials provide uniform appearance without pixelation.

## ELECTRICAL

Equipped standard with 120 fixed output driver operating at 60Hz.

## QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Suitable for closets according to NEC Section 410.8 & 410.16. Adheres to LM70, LM80 and TM21 industry standards. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. LED Models are Energy Star Qualified.

## INSTALLATION

Designed for wall mounting on 4" electrical J-Box.

## WARRANTY

3-year Limited Warranty. See warranty documentation for more info.

## COMPATIBLE JUNCTION BOXES



4" PVC

4" Octagon

4" PVC Ceiling Box

3-1/2" Octagon

4" Round Pancake

4" Octagon / V Bracket