

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



# AOS-C

## Outdoor Wall Light


The AOS Series is a small profile wall light, enhancing exterior spaces while ensuring safety and security. Crafted from robust die-cast aluminum housing with a tempered glass lens, these fixtures are ideal for hallways, garages, patios, and porches.



INPUT VOLTAGE	120V
INPUT FREQUENCY	60 Hz
RATED WATTAGE	12W
DELIVERED LUMENS	600 lm
EFFICACY	50
CRI	80
AVAILABLE CCT	2700K, 3000K, 3500K, 4000K, 5000K
LENS TYPE	Glass

RATED LIFE	30,000
L70	N/A
POWER FACTOR	N/A
THD	N/A
DIMMING	N/A
OPERATING TEMP.	-0.4°F - 104°F
BEAM ANGLE	139.2°

SERIES	DISTRIBUTION	RATED WATTAGE	COLOR TEMP	DRIVER TYPE	FINISH
<b>AOS-C</b>	<b>D</b>	<b>12</b>	<b>120</b>	<b>MCT</b>	<b>BL</b>
AOS-C Outdoor Wall Light	D- Down Only	12- 12W	120- 120V	MCT- 2700K, 3000K, 3500K, 4000K, 5000K; 80 CRI	BL- Black
					<b>ACCESSORIES</b>
					<b>EM-AOS-</b> EM Backplate with 8W Battery

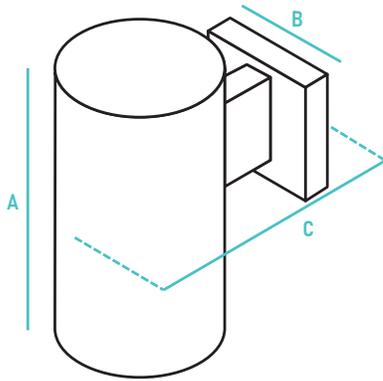

PERFORMANCE DATA				
	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
AOS-C	3000K	12W	635.2	52.93

### ADDITIONAL IMAGES

	A	B	C
AOS-C	8.11"	4.53"	3.94"

### CONSTRUCTION

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation fins provide superior thermal management for LED life and reliability. Clear Tempered glass lens

### ELECTRICAL

Equipped standard with 120V fixed output driver operating at 60Hz.

### QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications

### INSTALLATION

Designed for ceiling mounting on 4" electrical J-Box.

### WARRANTY

3-year Limited Warranty. See warranty documentation for more info.



EM-AOS  
(Sold Separately)

with Emergency Battery Backup  
(EM-AOS Sold Separately)

Made to order items. Minimum 90 day lead time.  
 Minimum order quantity may vary please contact sales.  
<sup>1</sup> DLC Listed / <sup>2</sup> DLC Premium Listed / <sup>3</sup> Title 24 / <sup>4</sup> JA8 & Title 24  
 Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information.  
 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

### COMPATIBLE JUNCTION BOX



4" PVC	4" Octagon	4" Round Pancake	4" Octagon / V Bracket
--------	------------	------------------	------------------------