

PROJECT	NOTES	TYPE	DATE	CAT. No.
---------	-------	------	------	----------



THF2

Security Light

Integrated long-life LED technology in an affordable, energy saving security lighting solution. Provides maintenance-free general and security illumination for outdoor use in residential and light commercial applications. Bright, uniform illumination is ideal for walkways, yards, patios, parking areas, driveways and egress easements creating an inviting exterior space as well as providing safety and security.




INPUT VOLTAGE	120V
INPUT FREQUENCY	60 Hz
RATED WATTAGE	25W
DELIVERED LUMENS	1500 lm
EFFICACY	60
CRI	80
AVAILABLE CCT	3000K
LENS TYPE	Plastic

RATED LIFE	50,000
L70	N/A
POWER FACTOR	Coming Soon
THD	N/A
DIMMING	N/A
OPERATING TEMP.	-0.4°F - 104°F
BEAM ANGLE	Coming Soon

SPECIAL ORDER

SERIES	RATED WATTAGE	DRIVER TYPE	COLOR TEMP	FINISH
THF2	25	120	830	BL
THF2 Security Light	25- 25W, 1500 Lumens	120- 120V	830- 3000K; 80CRI	BL- Black WH- White

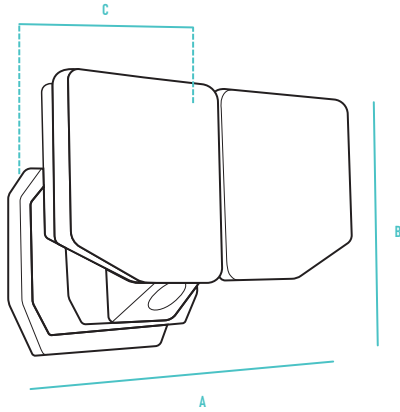

PERFORMANCE DATA				
	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
THF2	3000K	25W	1500	60

	A	B	C
THF2	8.64"	4.67"	4.2"

ELECTRICAL

Equipped standard with 120V fixed output driver operating at 60Hz.

QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Adheres to LM70, LM80, and TM21 industry standards.

INSTALLATION

Designed for ceiling mounting on 4" electrical J-Box.

WARRANTY

3-year Limited Warranty. See warranty documentation for more info.

Made to order items. Minimum 90 day lead time.
 Minimum order quantity may vary please contact sales.
¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 & Title 24
 Typical color consistency. May vary or be changed. L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information.
 Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

COMPATIBLE JUNCTION BOX



4" PVC



4" Octagon



4" Octagon / V Bracket