

| | | | | |
|---------|-------|------|------|----------|
| PROJECT | NOTES | TYPE | DATE | CAT. No. |
|---------|-------|------|------|----------|



PDD

Mini Pendant


Simplicity meets versatility: A simple-mini pendant with cylindrical glass shade ships with steel stems (3 x 12" and 1 x 6") making the fixture height adjustable to fit just about any setting – from above a small table to over a bar or kitchen island. A great way to provide task lighting with the right touch of ambience.

| | | | |
|-----------------|------------|-----------------|----------------------------|
| INPUT VOLTAGE | 120V | LENS TYPE | Frosted White Glass |
| INPUT FREQUENCY | 60 Hz | DIMMING | N/A |
| RATED WATTAGE | 60W MB Max | OPERATING TEMP. | 32°F - 104°F / 0°C to 40°C |

ORDER INFO / EXAMPLE: PDD-MB-120-F-BN

SPECIAL ORDER

| SERIES | LAMP CONFIGURATION | DRIVER TYPE | GLASS | FINISH |
|----------------------------|------------------------------|------------------|-------------------------|---|
| PDD | MB | 120 | F | BL |
| PDD Mini Pendant | MB- E26 Medium Socket | 120- 120V | F- Frosted White | BN- Brushed Nickel BL- Black |

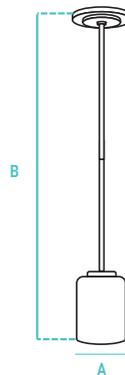

DIMENSIONS

| | A | B |
|------------|-------|---------------|
| PDD | 4.75" | 12.5" - 48.5" |

Made to order items. Minimum 90 day lead time. Minimum order quantity may vary please contact sales.

¹ DLC Listed / ² DLC Premium Listed / ³ Title 24 / ⁴ JA8 / Typical color consistency. May vary or be changed.

L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact GlobaLux for detailed information. / Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.