

Table with 5 columns: PROJECT, NOTES, TYPE, DATE, CAT. No.

FINISH OPTIONS ON PAGE 2



BDL
LED Disk Light

The BDL Series LED disk light provides versatile lighting on standard line voltage, yet produces the high energy savings you desire from LED fixtures. The BDL series allows for easy upgrade to your downlighting from the traditional recessed cans to a more modern looking, energy efficient solution. This disk light can be easily mounted onto a junction box. Ideal for closets, storage areas, attics, corridors, or as general lighting solution for residential and commercial applications.

WET LOCATION, ETL LISTED, TRIAC DIMMING, ELV DIMMING, 2YR WARRANTY, RoHS COMPLIANT

*See page 2 for more details


Table with 2 columns: Specification (INPUT VOLTAGE, INPUT FREQUENCY, RATED WATTAGE, DELIVERED LUMENS, EFFICACY, CRI, AVAILABLE CCT, LENS TYPE) and Value (120V, 60 Hz, See Performance Data, See Performance Data, >80 LPW, 90, 2700K, 3000K, 3500K, 4000K, 5000K, Plastic).

Table with 2 columns: Specification (RATED LIFE, L70, POWER FACTOR, THD, DIMMING, OPERATING TEMP., BEAM ANGLE) and Value (30,000hrs (Based on 3hrs a Day), >50,000hrs, >0.9, <20%, 120V Dimming (10-100%), -4°F - 113°F / -20°C to 45°C, N/A).

ORDER INFO / EXAMPLE: BDL-6-13-120D-930-J-WH-BULK

QUICK SHIP ITEMS ON PG.2

Table with 8 columns: SERIES, DIAMETER, RATED WATTAGE, DRIVER TYPE, COLOR TEMP, JA8, FINISH, CASE. Row 1: BDL, 6, 13, 120D, 930, J, WH, BULK. Row 2: Detailed specifications for each column.

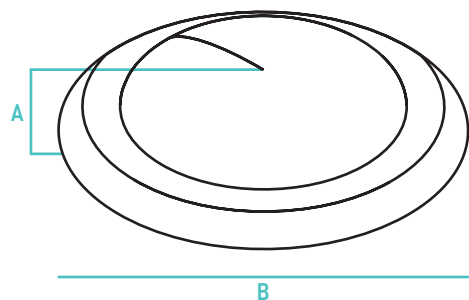

	A	B	Case QTY
BDL-6	1"	6.75"	12

CONSTRUCTION

Stamped steel housing with diffused lens for optimal visual comfort while providing exceptional light output. Lens design and materials provide uniform appearance without pixelation.

ELECTRICAL

Equipped standard with 120V, 15-100% dimming driver.

QUALIFICATIONS

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. ETL listed for damp location (wet location - with covered ceilings and properly sealed. See installation instruction). Suitable for closets according to NEC Section 410.8 & 410.16. Adheres to LM70, LM80 and TM21 industry standards. Title 24 Qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant. CEC Listed, State of California Energy Commission.

INSTALLATION

6" model designed for mounting on a 4" electrical J-Box. You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical elements.

WARRANTY


2-year Limited Warranty. See warranty documentation for more info.

PERFORMANCE DATA

FORM FACTOR	KELVIN	RATED WATTAGE	DELIVERED LUMENS	EFFICACY (LM/W)
6"	27K-5K	13W	850	65

ADDITIONAL IMAGES


WH- White



BL- Black



BN- Brushed Nickel



RECOMMENDED DIMMERS

DVCL-153P (Lutron) **Only for 120D Version**

COMPATIBLE JUNCTION BOX



4" PVC

4" Octagon

4" PVC Ceiling Box

3-1/2" Octagon

4" Round Pancake

4" Octagon / V Bracket