



Project	
Notes	
Type	Date
Cat. No.	

ECF™ Series

52" Ceiling Fan

DESCRIPTION

The ECF series are a family of ceiling fans featuring a simple 3 blade design. The clean lines and modern design of this AC Motor LED fan makes an elegant addition to your contemporary home décor. The reversible feature makes this fan perfect to use during every season.



ECF Series
52' Sweep



Limited Warranty 3 years
Light Source Efficacy : Up to 100W LPW

Special Order

Specification Features

Construction
Steel Housing, Black MDF Blades and Frosted Glass Light Diffuser provides uniform appearance without pixelation.

Motor
3-Speed AC Motor with 80" Lead Wire. Includes (1) 5" Downrod.

Blades
52" Sweep, 3,
Blade Pitch Angle:10.5°
Color: Silver

Electrical
Operates at 120V 60HZ. Optional Remote Control (Sold Separately). Optional Wall Control (Sold Separately) .

Qualifications
All ceiling fans are built to UL 507 standards, and bear appropriate ETL labels. Dry location labeling is standard.

Warranty
Light Source: 3-year limited warranty. Motor: Limited Lifetime Warranty. Non-Electrical 1 Year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

Ordering Information

Example:ECF-52-3-2MB-120D-830-BN-PC

ECF	52	3	2MB	120D	930	BN	PC
Series	Size	Fan Blade	Light Source	Driver Type	Color Temp	Finish	Accessory
ECF Ceiling Fan	52- 52" Sweep	3- 3 Blades	2MB- 2 Medium Base Socket; (2) 9.5W 800 Lumen Lamps	120D- 120V Dimming Dims to 10%	830- 3000K; 80+CRI	BN-Brushed Nickel	PC- Pull Chain

Specifications and Dimensions subject to change without notice.

Lighting Performance Summary

Input Voltage	120V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	> 80 LPW (typ.)
CRI	80+, R9> 0
Available CCT ¹	3000K
Color Consistency ²	5-step MacAdam Ellipse
Rated Life	50,000 hours
L70 ³	> 72,000 hours or > 45,000
Power Factor	>0.99
THD	< 20%
Dimming	Triac Dimming
Operating Temp.	-18°C to 40°C

Fan Performance Summary

Fan Diameter	52"
Motor Lead Lengths	80"
Motor Size	AC 170mm x 12mm
Electricity Use (H/M/L)	54.81W/29.5W/12.01W
AMPS (H/M/L)	0.45/0.35/0.22


Lighting Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
Frosted Glass	52"	ECF-52-3-2MB-120D-930	16W	1600	100

Fan Performance Data

RPM (H/M/L)	190/145/88
Airflow Efficiency (CFM/W)	109
Airflow (CFM)	High Speed: 5,215
Average Airflow CFMave	3790

Product Dimensions

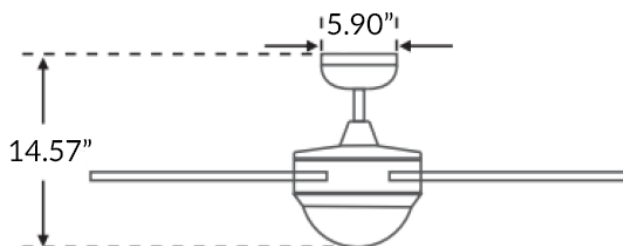

NOTES:

- ¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- ²
- ⁴ Typical color consistency. May vary or be changed.
- ⁵ L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information
- ⁶ Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.



Specifications and Dimensions subject to change without notice.