



CCT Adjustable Vaportight LED Strip
LVTS Series

High Performance Design Can Customize To Your Environment

Battery Backup

Battery backup available for emergency egress applications.

High Efficacy LEDs

Performance ranges up to 100 LPW. Long-life 60,000 hour LED's at L80 with projected life over 100,000 hour at L70 hours for reliable performance and minimal maintenance.

Lens

High impact Frosted polycarbonate Lens provides uniform appearance without LED pixelation.

Latches

Multiple stainless steel latches.

CCT Switch

CCT Switch technology can accommodate multiple color temperatures, from the warmest to the coolest tones of white. LVTS color temperature can be adjusted to either 3000K, 4000K, or 5000K.

Housing

UV stabilized injection molded, impact resistant, polycarbonate housing.

Hassle-Free Mounting

Quick mounting clips included. Suitable for suspension or surface mounting.

COLOR TEMPERATURE ADJUSTMENT SETTING


3000K 4000K 5000K



3000K 4000K 5000K



3000K 4000K 5000K



Ordering Information

Dimensions



ECW Series

2' Length

26W (2600 Lumens)

4' Length

40W (4000 Lumens)

Rated Life 60,000 hours

Limited Warranty 3 years

Efficacy Up to 100 LPW

Quick Ship

ECW-4-40-MV-MCT
ECW-2-26-MV-MCT

Specification Features

Construction

Rugged construction, solid die formed, cold-rolled steel housing. All surfaces powder coated after fabrication. Frosted polystyrene diffusers provides even consistent light while reducing glare. Lens design and materials provide uniform appearance without pixelation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards.

Warranty

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

Electrical

Equipped standard with fixed output driver. Long-Life LED's 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs. CCT adjustable switch included.

Installation

Suitable for surface mounting, suspension, or stem mounting, individually or in continuous.

Ordering Information

Example: ECW-4-40-MV-MCT

ECW	4	40	MV	MCT
Series ECW LED Economic Wraparound	Size 2- 2' Length 4- 4' Length	Rated Wattage 2' Length 26W (2600 Lumens) 4' Length 40W (4000 Lumens)	Driver Type MV- 120-277V	Color Temp 830/40/50- 3000/4000/5000 K Selectable Switch; 80+CRI

Specifications and Dimensions subject to change without notice.

Adders Options & Accessories



Fixture Mounted Occupancy, On/Off

An economical fixture mounted sensor utilizing passive infrared technology turns the fixture On/Off.




Microwave Bi-Level Sensor Fixture Mount

An IP65 and remote capable part of the Globalux family of Intelligent sensors that dims the fixture to either 10,20,30, or 50% of full light output for safety and code compliance, and automatically switches to full illumination when the space is occupied.



Integral Microwave Sensor, On/Off

An economical fixture mounted sensor utilizing passive infrared technology turns the fixture On/Off.

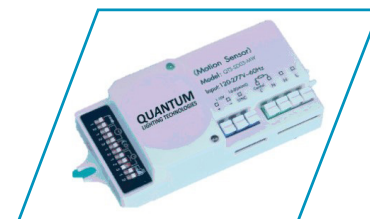

Integral Bi-Level Microwave Sensor

Part of the Globalux family of Intelligent sensors that dims the fixture to either 10,20,30, or 50% of full light output for safety and code compliance, and automatically switches to full illumination when the space is occupied.



Emergency Battery

The emergency battery back-up provides 90 minutes of power to your fixture in the event of an emergency.



High Voltage Transformers

High voltage transformers allow the fixture to receive a higher power input of 347V-480V.



Cords & Plug Option

Standard 6ft cord with custom lengths and plugs available for wiring fixture.



Fixture Whips

Armored cable fixture whips used for lighting and power distribution.

Emergency Battery Back-up

EML8	800 Lumen Emergency Battery
EML16	1600 Lumen Emergency Battery

Motions Sensors

OS	Fixture Mounted Occupancy Sensor
MOS	Integral Mic. Sensor On/Off
MOSB	Integral Mic. Sensor Bi-Level
MOSB-FM	Fixture Mounted Mic. Sensor Bi-Level

Cords, Plugs and Whips

FW3	3FT Flex 18/4
FW4	4FT Flex 18/4

MV	120-277V
MVD	120-277V; 0-10V Dimming
HVD	347-480V; 0-10V Dimming
HV	347-480V