


## SAFETY INSTRUCTIONS

PLEASE READ THESE INSTRUCTIONS CAREFULLY AND SAVE THEM, AS YOU MAY NEED THEM AT LATER DATE.

1. Turn off electrical power before starting installation of light fixture.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. Caution risk of fire. Consult a qualified electrician to ensure correct branch circuit conductor.
4. For external use only, recommend applying waterproof silicone to seal around trim and ceiling.
5. **MIN 90 °C SUPPLY CONDUCTORS .**

## NEEDED TOOLS

- Pliers
- Wire Cutter
- Wrench
- Phillips Screwdriver



## INSTRUCTIONS

1. Use the hole opener to make the holes in the ceiling according to the size.
2. Connect the wire to the input end of the power box with a wiring cap and place it in the ceiling.
3. Connect the lamp with the drive box.
4. Install the spring clips at both ends of the product vertically into the holes by hand.
5. Put in the spring buckles on both sides and finished the installation.




Fig.1

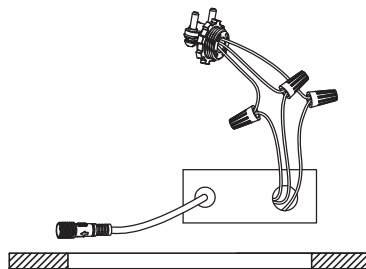


Fig.2

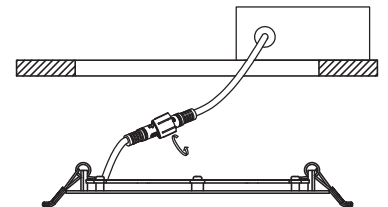


Fig.3

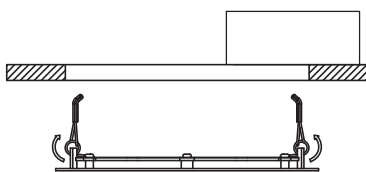


Fig.4



Fig.5