


Ordering Information

Dimensions

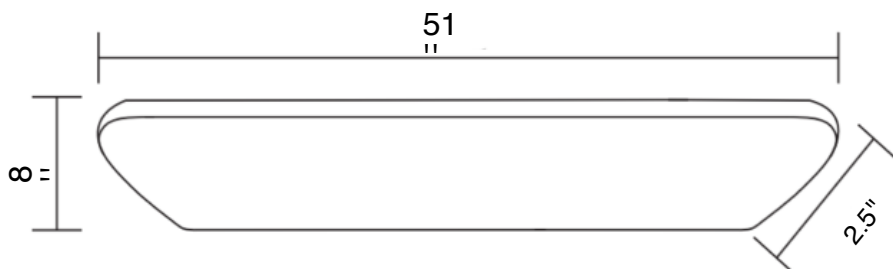

LSMP Series

40W (3520 Lumens)

Specification Features



Construction

Rugged construction, solid die formed, cold-rolled steel housing. All surfaces powder coated after fabrication. Frosted acrylic diffusers provides even consistent light while reducing glare. Lens design and materials provide uniform appearance without pixelation.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

Electrical

Equipped standard with fixed output driver. Optional 0-10V continuous dimming driver that works with any standard 0-10V control/dimmer. Long-Life LED's 60,000 hours at L80 with projected life over 100,000 hours for reduced life cycle maintenance costs.

Installation

Suitable for surface mounting, suspension, or stem mounting, individually or in continuous rows.

Warranty

5-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

Rated Life 60,000 hours
Limited Warranty 5 years
Efficacy up to 88 LPW
Continuous Dimming



Quick Ship

LSMP-8-40-MV-940

Ordering Information

Example:LSMP-8-40-MV-940

LSMP	8	40	MVD	9	40
Series LSMP LED Surface Mounted Puff	Size 8- 8" Width	Rated Wattage 40- 40W (3520 Lumens)	Driver Type MV- 120-277V MVD- 120-277V; 0-10V Dimming ¹	CRI 9 90+CRI	Color Temp 40 4000K 50 5000K ¹

Specifications and Dimensions subject to change without notice.

¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

² Energy Star Listed