



Project	
Notes	
Type	Date
Cat. No.	

SKY™ Series

SkyLux 52" Ceiling Fan



DESCRIPTION

The SKY series are a family of ceiling fans featuring a simple 3, 4 or 5 blade designs. The clean lines and modern design of this AC Motor LED fan makes an elegant addition to your contemporary home décor. The reversible feature makes this fan perfect to use during every season.

SKY Series
52' Sweep



Limited Warranty 3 years
Light Source **Efficacy** : Up to 100W LPW

Specification Features

Construction

Steel Housing, Plywood Blades and Frosted Glass Light Diffuser provides uniform appearance without pixelation.

Motor

3-Speed AC Motor with 80" Lead Wire. Includes (1) 6" Downrod.

Blades

52" Sweep, 3, 4 or 5 Blade Configurations
Blade Pitch Angle:10.5°
Color: Silver

Electrical

Operates at 120V 60HZ. Optional Remote Control (Sold Separately). Optional Wall Control (Sold Separately) .

Qualifications

All ceiling fans are built to UL 507 standards, and bear appropriate ETL labels. Dry location labeling is standard.

Warranty

Light Source: 3-year limited warranty. Motor: Limited Lifetime Warranty. Non-Electrical 1 Year Limited Warranty. See complete warranty for terms and exclusions. (Labor not included).

Quick Ship

SKY-52-3-2MB-120D-830-BN-BL-PC
SKY-52-4-2MB-120D-830-BN-BL-PC
SKY-52-3-2MB-120-830-BN-SL-PC
SKY-52-4-2MB-120D-830-BN-SL-PC

Ordering Information

Example:SKY-52-3-2MB-120D-830-BN-SL-PC

SKY	52	3	2MB	120D	830	BN	SL	PC
Series	Size	Fan Blade	Light Source	Driver Type	Color Temp	Finish	Blade Color	Accessory
SKY Skylux Ceiling Fan	52- 52" Sweep 54- 52" Sweep	3-3 Blades 4-4 Blades 5-5 Blades	2MB- 2 Medium Base Socket; (2) 9.5W 800 Lumen Lamps 18- 18W Integrated LED 1800 Lumens	120D- 120V Triac Dimming	830- 80 CRI, 3000K MCT- 80 CRI, 3000K, 4000K, 5000K CCT Adjustable (Available with Integrated LED Option Only)	BN-Brushed Nickel WH- White BL- Black	BL-Black DW- Dark Walnut RW- Rosewood SL-Silver	PC- Pull Chain WC- Wall Control

Specifications and Dimensions subject to change without notice.

Lighting Performance Summary

Input Voltage	120V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	> 80 LPW (typ.)
CRI	80+, R9> 0
Available CCT ¹	3000K
Color Consistency ²	5-step MacAdam Ellipse
Rated Life	50,000 hours
L70 ³	> 72,000 hours or > 45,000
Power Factor	>0.99
THD	< 20%
Dimming	Triac Dimming
Operating Temp.	-18°C to 40°C

Fan Performance Summary

Fan Diameter	52"
Motor Lead Lengths	17"
Motor Size	AC 153mm x 15mm
Electricity Use (H/M/L)	54.81W/29.5W/12.01W
AMPS (H/M/L)	0.45/0.35/0.22
Fan Diameter	54"
Motor Lead Lengths	17"
Motor Size	AC 153mm x 18mm
Electricity Use (H/M/L)	54.81W/29.5W/12.01W
AMPS (H/M/L)	0.45/0.35/0.22


Lighting Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
Frosted Glass	52"	SKY-52-3-2MB-120D-930	19W	1600	84

Fan Performance Data

RPM (H/M/L)	190/145/88
Airflow Efficiency (CFM/W)	109
Airflow (CFM)	High Speed: 5,215
Average Airflow CFMave	3790

Product Dimensions

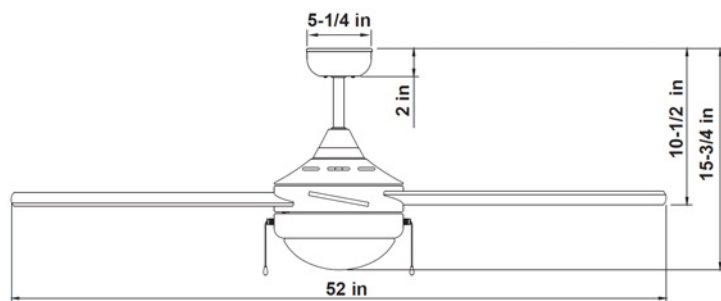

NOTES:

- Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
-
-
- Typical color consistency. May vary or be changed.
- L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information
- Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.



Specifications and Dimensions subject to change without notice.