






# **Ordering Information**

# **Dimensions**

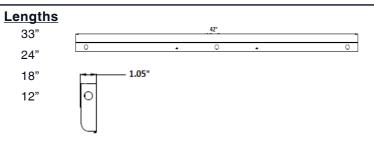











# **Specification** Features

### Construction

Low profile steel housing available in white, nickel, satin, or oil rubbed bronze finishes. Designed to prevent "hot spots" on counter tops. Lens design and materials provide uniform appearance without pixleation.

### Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

#### **Electrical**

Equipped standard with 120V 15-100% dimming driver, operating at 60Hz. Dims to 10%.

#### Installation

Each unit is secured to mounting surface using two fasteners. All mounting hardware included.

#### Warranty

3-year Limited Warranty. See warranty documentation for more information.

# **UCL** Series

9" Length

12" Length

18" Length 24" Length

33" Length

42" Length

Rated Life 50,000 hours Limited Warranty 3 years Efficacy Up to 51 LPW **Continuous** Dimming



### **Quick** Ship

UCL-9-5-120D-930/40-WH UCL-12-5-120D-930/40-WH UCL-18-9-120D-930/40-WH UCL-21-9-120D-930/40-WH UCL-24-9-120D-930/40-WH UCI -33-14-120D-930/40-WH UCL-42-18-120D-930/40-WH

# **Ordering** Information

Example: UCL-12-5-120D-930-WH

UCL	12	5	120D	9	30/40	WH
Series UCL LED Undercabinet Fixture	Form Factor  9- 9" Length 12- 12" Length <sup>2</sup> 18- 18" Length <sup>2</sup> 21- 21" Length <sup>2</sup> 24- 24" Length <sup>2</sup> 33- 33" Length <sup>2</sup> 42- 42" Length <sup>2</sup>	Rated Wattage  5-5W, 9" Length <sup>2</sup> 5- 5W, 12" Length <sup>2</sup> 9-9W, 18" Length <sup>2</sup> 9-9W, 21" Length <sup>2</sup> 9-9W, 24" Length <sup>2</sup> 14-14W, 33" Length <sup>2</sup> 18-18W, 42" Length <sup>2</sup>	Driver Type  120D- 120V Dimming, Dims to 10%	9 90+ CRI	Color Temp 30/40-3000-4000 Kelvin Dual color switch <sup>2</sup>	Finish  NS- Nickel Satin <sup>1 2</sup> ORB- Oil Rubbed  Bronze <sup>1 2</sup> WH- White <sup>2</sup>
				Options  Accessories  RS- Rock Sw O- Convenie	vitch	

Specifications and Dimensions subject to change without notice.

- Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- Energy star listed