



Project	
Notes	
Type	Date
Cat. No.	

OWPL™ Series **Rectangular Outdoor Wall Pack**

DESCRIPTION

The OWPL LED wall pack combines high-performance LEDs, a weather resistant aluminum housing along with a frosted white high impact diffuser for uniform illumination. Ideal for use in corridors and patios.



OWPL Series
12W, 800 Lumens



Specification Features

Construction

Rugged die cast aluminum housing withstands outdoor environments. Outer surface treated with durable power coating to provide resistant to corrosion, rust, weathering, and or degradation. Performance engineered internal heat dissipation provide superior thermal management for LED life and reliability.

Qualifications

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Wet location labeling is standard. Emergency equipped fixtures labeled UL924. Adheres to LM70, LM80, and TM21 industry standards. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications.

Electrical

Equipped standard with 120V fixed output driver operating at 60HZ.

Installation

Designed for mounting on 4" electrical J-Box.

Warranty

3-year Limited Warranty. See warranty documentation for more information.

Rated Life 60,000 hours
Limited Warranty 3 years
Efficacy Up to 66 LPW

Quick Ship

OWPL-12-120-MCT-WH

Ordering Information

Example: OWPL-12-120-MCT-WH

OWPL	12	120	8	MCT	WH	
Series OWPL Rectangular Outdoor Wall Pack	Rated Wattage 12-12W, 800 Lumens	Driver Type 120- 120V	CRI 8 80+ CRI	Color Temp MCT- CCT Adjustable 3000K, 4000K, 5000K	Color WH-White	

Specifications and Dimensions subject to change without notice.

Performance Summary

Input Voltage	120V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	> 66.6 LPW (typ.)
CRI	83+, R9 > 0
Available CCT ¹	3000K, 4000K, 5000K
Color Consistency ²	5-step MacAdam Ellipse
Rated Life	60,000 hours
L70 ³	> 72,000 hours or > 45,000
Power Factor	> 0.9
THD	< 20%
Dimming	N/A
Operating Temp.	-18°C to 40°C

Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
Acrylic		OWPL-12-120	12	800	66.6


NOTES:

- ¹ Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- ² Energy star listed
- ³ Quick ship: 3000K, 4000K, 5000K. Other CCTs may require a lead time or be special order
- ⁴ Typical color consistency. May vary or be changed.
- ⁵ L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information



Specifications and Dimensions subject to change without notice.

Product Dimensions

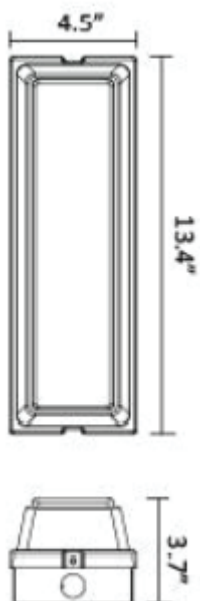

© 2019 GlobaLux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. GlobaLuxighting reserves the rights make changes in specification at any time without notice.

GlobaLux Lighting LLC
www.globaluxlighting.com
2037 S. Vineyard Ave
Ontario, CA 91761
Ph: 909-591-7506